



CLS - Downlighters - Florence GIII series

Main features:

EN

Ultra compact 3 Watt built in spot, an efficient replacement for 20 Watt halogen light sources.

Dimming possible through 1-10V, trailing edge or DMX 512.

Cree LED inside.

Is supplied with a round mounting plate.

7 different mounting plates optional available.

Horizontally and vertically adjustable.

40° lens is mounted. A 15° spot lens is included in the packaging.

Massive aluminium CNC cut housing for optimal cooling of the LED light source.

CLS SmartConnect system for ease of installation.

NL

Ultra compacte 3 Watt inbouwspot voor talloze toepassingen ter vervanging van 20 Watt Halogeenspots.

Dimbaar middels, 1-10V, fase afsnijding & DMX 512
Voorzien van een Cree LED.

Wordt geleverd inclusief een ronde montage plaat.


Optioneel zijn 7 verschillende montage platen leverbaar.

Armatuur is horizontaal en verticaal verstelbaar.

Naast de gemonteerde 40° lens wordt een 15° spot lens meegeleverd.

CNC gefreesde massief aluminium behuizing voor optimale koeling van de LED lichtbron.

Voorzien van het CLS SmartConnect systeem.

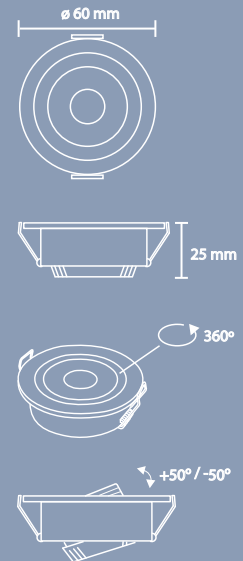

Products Florence GIII series:

87130002



CLS Florence GIII module + round plate 40° 3000K 700mA, Black, ø 60 x 25 mm (h)

