

REVO MODULAR 3000K 30°

**ENG**

Fixture  
LED  
Colour temperature  
Emission angle  
Luminous flux  
Efficiency  
CRI-RA  
Power consumption  
Power factor


**NE**

Armatuur: CLS REVO Modular  
LED: Luxeon T  
Kleurtemperatuur: 3112K  
Stralingshoek: 32°  
Lichtstroom: 1495 Lumen  
Efficiëntie: 79 lumen / Watt  
CRI-RA: Typical > 85  
Vermogen: 18,9 Watt  
Power factor: 0.95



Item #: R-2-X-03-3

Radiation diagram / Stralingsdiagram

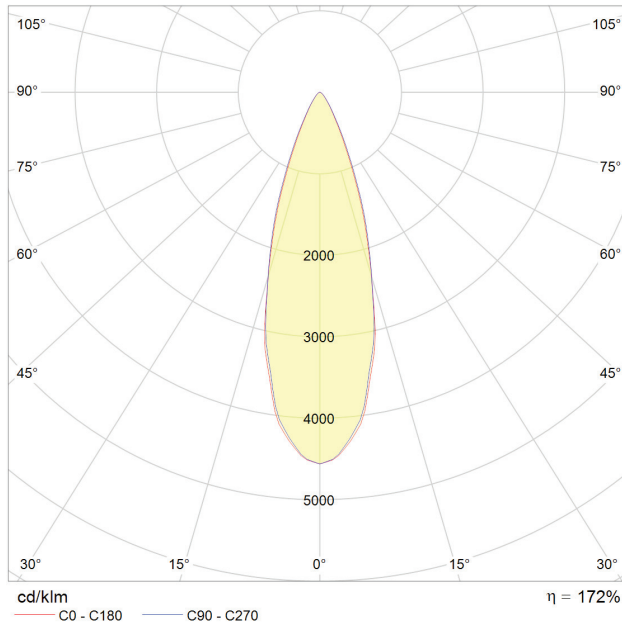

Overview table / Overzichtstabel

0.5	0.29	E(0°)	27274
	0.28	E(C90) 16.0°	12144
		E(C0) 15.9°	12211
1.0	0.57	E(0°)	6819
	0.57	E(C90) 16.0°	3036
		E(C0) 15.9°	3053
1.5	0.86	E(0°)	3030
	0.85	E(C90) 16.0°	1349
		E(C0) 15.9°	1357
2.0	1.15	E(0°)	1705
	1.14	E(C90) 16.0°	759
		E(C0) 15.9°	763
2.5	1.43	E(0°)	1091
	1.42	E(C90) 16.0°	486
		E(C0) 15.9°	488
3.0	1.72	E(0°)	758
	1.71	E(C90) 16.0°	337
		E(C0) 15.9°	339
Distance [m]	Cone Diameter [m]	Illuminance [lx]	
— C0 - C180 (Half-Angle Value: 31.8°)			
— C90 - C270 (Half-Angle Value: 32.0°)			