
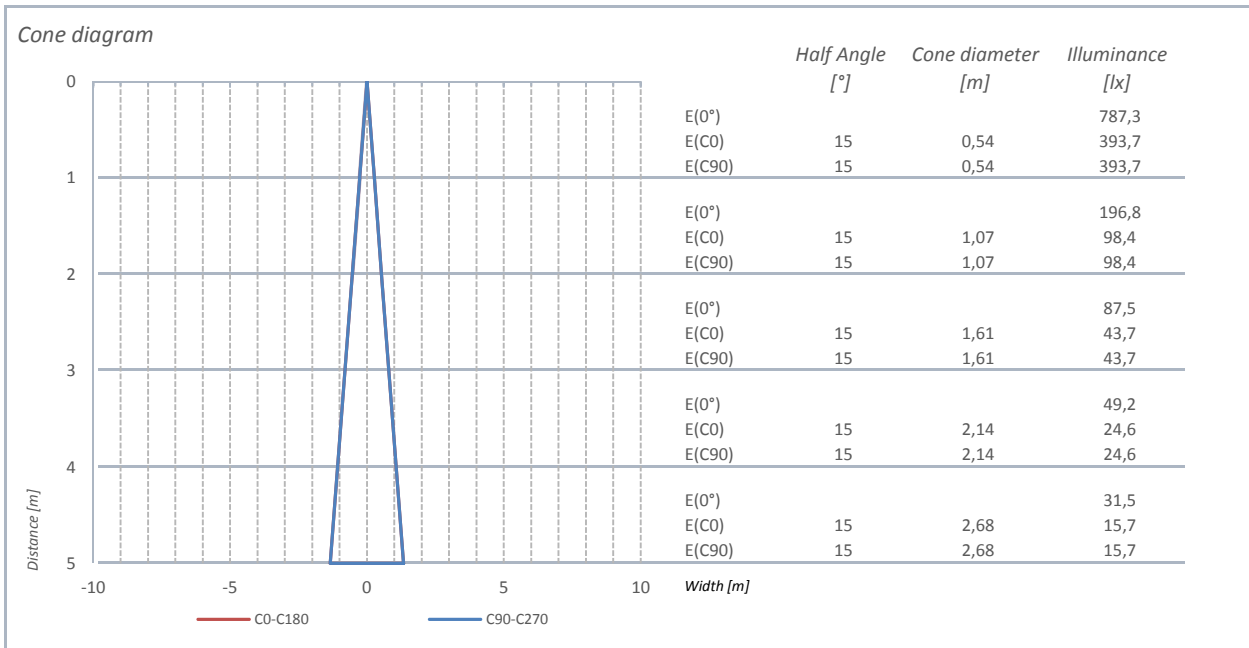
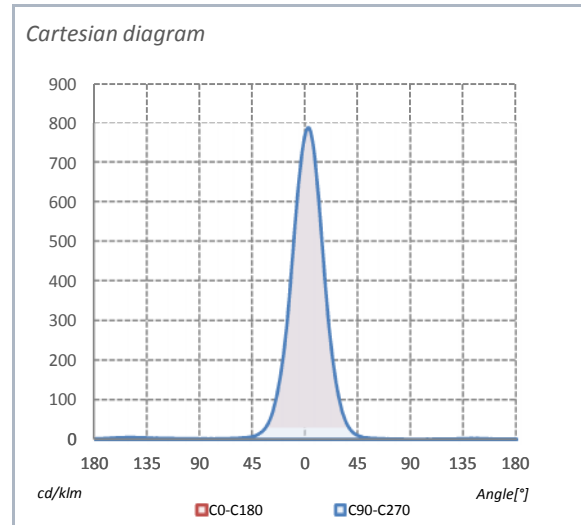


PHOTOMETRICS

REVO MICRO 3000K 30°

Article number	RM-1-1-07-3
Date	5-2-2015
CCT (Kelvin)	3079K
Beam angle	30°
Luminous flux	283,1 lm
Efficiency	57 lm/watt
CRI (RA)	97,6
Weighted energy	4,99kWh/1000h
Power factor	0,55
Dimensions (HxWxD)	110 x 54 x 45mm

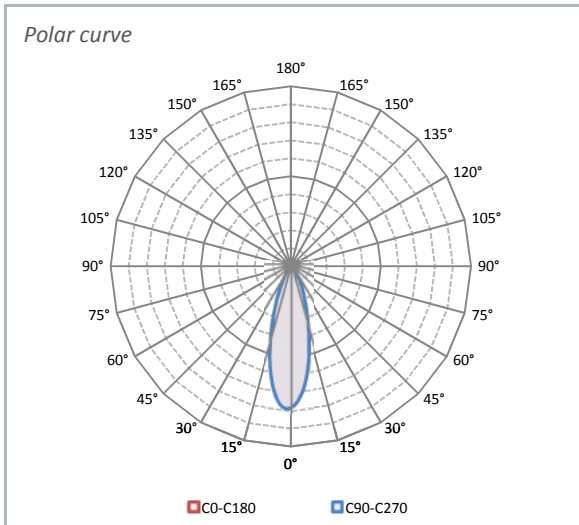

CLS-LED BV
 info@cls-led.com
 www.cls-led.com

2015 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this manual. No part of this manual may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf