CLS - Surface mounted - HYLO series

Main features:

EN

Available as uplighter, downlighter and up-/down-lighter.

Choice of multiple colours of LED light sources and a variety of beam angles.

The up/down version offers the possibility to use two different colours of light and two different beam angles within one single fixture.

Up to 80% energy savings compared to traditional light sources.

High light output due the latest generation of Luxeon/Cree LEDs in combination with high quality optics.

Massive aluminum CNC housing for optimum cooling properties.

Built-in 180-264 VAC power supply for easy installation.

NL

Leverbaar als uplighter, downlighter en up/down-lighter.

Keuze uit meerdere kleuren LED lichtbronnen en lenssystemen.

Bij de up/down versie mogelijkheid om twee verschillende kleuren licht en twee verschillende openingshoeken in een enkel armatuur te creëren.

Tot 80% energiebesparing ten opzichte van conventionele lichtbronnen.

Hoge lichtopbrengst dankzij de laatste generatie Luxeon/Cree LEDs in combinatie met het hoogwaardige optische lens systeem.

Massief aluminium CNC gefreesde behuizing voor maximale koeling van de LEDs.

Ingebouwde 180-264 VAC voeding voor een eenvoudige installatie.





Configuring a HYLO is extremely simple: Just choose from the different model options, housing colours, LED colours and lens types. Simply follow the steps in the overview below to obtain your HYLO code.

1) HYLO: H

2) Model:
1 HYLO
2 HYLO UP lighter
3 HYLO DOWN lighter

3) Housing colour:
1 Blank anodised aluminum

4) LED colour UP:		
01	Cold white	6300K
02	Neutral white	4000K
03	Warm white	3000K
04	Extra warm white	2700K
05	Fresh white	5000K
11	Red	
22	Royal blue	
31	Amber	
41	Green	
XX	No LEDS HYLO Down	

4) LED colour DOWN:		
01	Cold white	6300K
02	Neutral white	4000K
03	Warm white	3000K
04	Extra warm white	2700K
05	Fresh white	5000K
11	Red	
22	Royal blue	
31	Amber	
41	Green	
XX	No LEDS HYLO UP	

5) Lens kit UP:
1 12° lenses (Spot)
2 12 x 46° lenses (Elliptical)
3 30° lenses (Medium Flood)
4 54° lenses (Wide Flood)
5 8° lenses (Superspot)
X No lenses HYLO Down

5) Lens kit DOWN:
1 12° lenses (Spot)
2 12 x 46° lenses (Elliptical)
3 30° lenses (Medium Flood)
4 54° lenses (Wide Flood)
5 8° lenses (Superspot)
X No lenses HYLO UP

Example: You would like to order a HYLO with blank housing, warm white LEDs UP and amber LEDs DOWN, wide flood lenses UP and spot lenses DOWN; your unique HYLO order number will be: H - 1 - 1 - 0331 - 41.

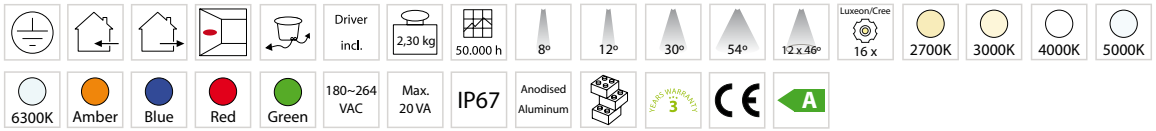

www.cls-led.com
© CLS March 2012